

Specification for
50G PAM4 QSFP28 ER40km Optical Transceiver

Model number: YQ56-P3140



Revision History

Revision	Initials	Date	Description
1	EA	07/21/2019	Initial specification release
2			
3			
4			
5			

Table of Contents

1. GENERAL DESCRIPTION	5
1.1 OVERVIEW	5
1.2 GENERAL FEATURES OF THIS MODULE.....	5
1.3 MODULE BLOCK DIAGRAM	6
2. FUNCTIONAL DESCRIPTION.....	6
2.1 TRANSMITTER OPERATION	6
2.2 RECEIVER OPERATION	6
2.3 I2C INTERFACE.....	6
3. IDENTIFICATION OF PINOUT ASSIGNMENT	7
3.1 BOTTOM ROW PINS DESCRIPTION	8
3.2 TOP ROW PINS DESCRIPTION	9
4. ABSOLUTE MAXIMUM RATINGS	10
4.1 ENVIRONMENTAL.....	10
4.2 ELECTRICAL	10
4.3 OPTICAL.....	10
5. RECOMMENDED OPERATING CONDITIONS.....	10
6. OPTICAL CHARACTERISTICS.....	11
7. MECHANICAL CHARACTERISTICS.....	12
7.1 MODULE OUTLINE DRAWING	12
7.2 IDENTIFICATION LABEL	12
7.3 PACKAGE BOX	12
8. REGULATORY AND RELIABILITY SPECIFICATIONS.	13
8.1 LASER SAFETY.....	13
8.2 ESD	13
8.3 ELECTROMAGNETIC EMISSION	13
8.4 FLAMMABILITY.....	13
8.5 ROHS.....	13
8.6 RELIABILITY	13

1. GENERAL DESCRIPTION

The YOUTHTON 50G PAM4 QSFP28 modules offer customers 50Gb/s electrical interface compliant with CEI-28G-VSR standard for 50GAUI-2 with 2X25Gb/s high speed CML signal and 50Gb/s PAM4 optical interface, up to 40km reach on single mode fiber for 50G ER application.

1.1 Overview

YQ56-P3140 is a 50 Gbps transceiver module for optical communication applications compliant to 50G ER requirement. The module converts 2 inputs channels of 25Gbps electrical data to single PAM4 optical signals for 50Gbps optical transmission. Reversely on the receiver side, the module receives 50Gbps PAM4 optical signals and then converts them to electrical data for 2 output channels.

The central wavelength of the optical channel is 1310nm. For SMF applications, the transceiver module has an operating range up to 40km SMF with nominal bit rate of 26.5625 Gbaud/s.

YQ56-P3140 is designed with QSFP28 form factor, optical/electrical connection and I2C interface according to the SFF series standard.

1.2 General features of this module

- Hot-pluggable QSFP28 form factor
- Supports 50GBASE-ER (26.5625 Gb/s)
- 25G EML-Based linear transmitter
- 25G APD linear receivers
- Power consumption < 3.5W
- Commercial case temperature: 0°C to 70°C
- Maximum 40km link distance on SMF with KP4 FEC
- Diagnostic features through I2C interface per SFF 8636 standard
- Providing real-time monitoring of
 - Transmitted optical power
 - Received optical power
 - Laser bias current
 - Module temperature
 - Supply Voltage
- Industry-standard LC duplex connector
- IEC 60825-1 Class 1/CDRH Class 1 laser eye safe
- Compliance with Restriction on Hazardous Substances (RoHS)

Pin #	Symbol	Description	I/O	Logic	“H”	“L”
11	SCL	2-Wire Serial Interface Clock	I/O	3.3V LVCMOS		
12	SDA	2-Wire Serial Interface Data	I/O	3.3V LVCMOS		

Table 1: I2C Interface Pins

3. IDENTIFICATION OF PINOUT ASSIGNMENT

The QSFP28 connector has 38 pins which are arranged in Top and Bottom rows. The detailed description of the Bottom row ranges from pin 1 to pin 19 and pin 20 to pin 38 are shown in Table 2 and Table 3 below. The pin orientation is shown below in Figure 2.

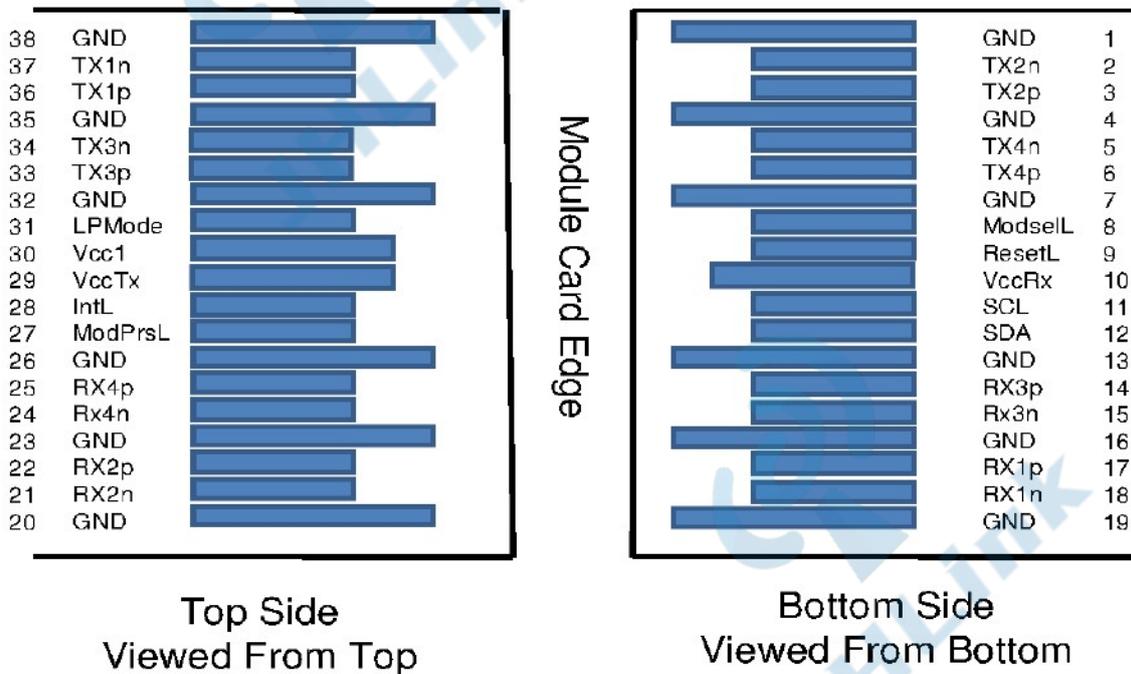


Figure 2: Pad orientation and layout

3.1 Bottom row pins description

The following table gives a short description of each electrical pin from pin 1 through pin 19 on bottom side.

PIN #	NAME	I/O	Logic	Description
1	GND			Ground
2	Tx2n	I	CML	CH2 transmitter inverted data input
3	Tx2p	I	CML	CH2 transmitter Non-inverted data input
4	GND			Ground
5	N.C.			
6	N.C.			
7	GND			Ground
8	ModSelL	I	LVTTL	Module select
9	ResetL	I	LVTTL	Module reset
10	VCC			+3.3V Module power supply
11	SCL	I/O	3.3V LVCMOS	2-Wire Serial Interface Clock
12	SDA	I/O	3.3V LVCMOS	2-Wire Serial Interface Data
13	GND			Ground
14	N.C.			
15	N.C.			
16	GND			Ground
17	Rx1p	O	CML	CH1 receiver non-inverted data output
18	Rx1n	O	CML	CH1 receiver inverted data output
19	GND			Ground

Table 2: Description of the Bottom row ranges from pin 1 through pin 19

3.2 Top row pins description

The following table gives a short description of each electrical pin from pin 20 through 38 on top side.

PIN #	NAME	I/O	Logic	Description
20	GND			Ground
21	Rx2n	O	CML	CH2 receiver inverted data output
22	Rx2p	O	CML	CH2 receiver Non-inverted data output
23	GND			Ground
24	N.C.			
25	N.C.			
26	GND			Ground
27	ModPrsL	O	LVTTL	Module present
28	IntL	O	LVTTL	Interrupt
29	VCC			+3.3V Module power supply
30	VCC			+3.3V Module power supply
31	LPMode	I	LVTTL	Low power mode
32	GND			Ground
33	N.C.			
34	N.C.			
35	GND			Ground
36	Tx1p	I	CML	CH1 transmitter non-inverted data input
37	Tx1n	I	CML	CH1 transmitter inverted data input
38	GND			Ground

Table 3: Description of the top row ranges from pin 20 through pin 38

4. ABSOLUTE MAXIMUM RATINGS

4.1 Environmental

Parameter	Symbol	Min	Max	Unit	Note
Storage and Transportation Temperature	T_s	-40	+85	°C	
Relative Humidity	RH	5	+95	%	1
Operating Case Temperature	T_{op}	0	70	°C	

Table 4: Max. environmental ratings

Note:

1. Non-condensing.

4.2 Electrical

Parameter	Symbol	Min	Max	Unit	Note
+3.3V Power Supply Voltage	VCC3	-0.5	+3.6	V	
Input LVTTTL Control		0	VCC	V	
LVTTTL output DC current		0	20	mA	
ESD	V_ESD		500	V	1

Table 5: Max. electrical ratings

Note:

1. Human body model per JEDEC JESD22-A114-B.

4.3 Optical

Parameter	Symbol	Min	Max	Unit	Note
Input Optical Power of RX	P_{in}		-2.4	dBm	

Table 6: Max. optical rating

5. RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	Min	Max	Unit	Note
Relative Humidity	RH	5	+85	%	1
Operating Case Temperature	T_{opc}	0	70	°C	
Power Supply Voltage	VCC	3.14	3.45	V	

Table 7: Recommended operating conditions

Note:

1. Non-condensing.

6. OPTICAL CHARACTERISTICS

Unless otherwise stated the following parameters and performances are over the full range of operating conditions defined in section 5, over the full wavelength range. The typical values are referenced to case temperature of +35 C, nominal power supply, beginning of life.

Parameter	Symbol	Min.	Typ.	Max.	Units	Ref.
Transmitter						
Signaling speed per lane			26.5625		GBd/s	
Data rate variation		-100		+100	ppm	
Modulation format			PAM4			
Lane center wavelength	WL	1304.5		1317.5	nm	
Side mode suppression ratio (SMSR)	SMSR _{min}	30			dB	
Average launch power	P _{ave}	0.4		6.6	dBm	
Optical modulation amplitude	P _{oma}	3.4		7.4	dBm	
Launch power in OMA minus TDECQ		2			dBm	
Transmitter and dispersion eye closure for PAM4	TDECQ	-	-	3.2	dB	1
Average launch power of OFF transmitter, each lane	P _{off}			-15	dBm	
Optical extinction ratio	ER	6			dB	
Transmitter reflectance	TXref			-26	dB	
Optical return loss tolerance	ORLT			15	dB	
Relative intensity noise	RIN			-132	dB/Hz	
Receiver						
Signaling speed per lane			26.5625		GBd/s	
Data rate variation		-100		+100	ppm	
Modulation format			PAM4			
Lane center wavelength	WL	1304.5		1317.5	nm	
Receiver sensitivity (OMA _{outer})	Sens			-15.1	dBm	1
Overload receiver power	P _{ovl}	-3.4			dBm	1
Receiver reflectance	RXref			-26	dB	
Stressed sensitivity (OMA)				-13.3	dBm	
Conditions of stressed receiver sensitivity test:						
Stressed eye closure for PAM4 (SECQ)				3.2	dB	
Links						
Power budget				20.3	dB	
Operating distance				40	km	
Discrete reflectance				- 26	dB	

Table 8: Optical characteristics of 50G ER application

Note:

1. 2.4E-4 BER, PRBS15;

7. MECHANICAL CHARACTERISTICS

7.1 Module outline drawing

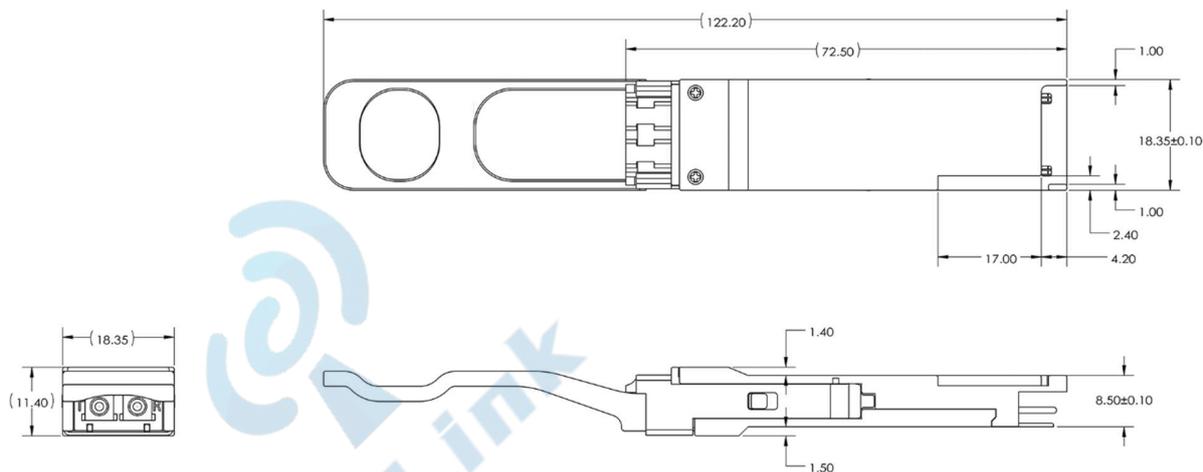



Figure 3: Mechanical outline drawing

7.2 Identification Label

Label locate on bottom side of QSFP28 module, position and style are as figure 4 below. 1-D barcode on label is code 139 type. Label size is 50X40mm, color white.

7.3 Package box

Package box are Anti-electrostatic material, color black, with ESD label sealed. Each package contains 10pcs QSFP28 module.

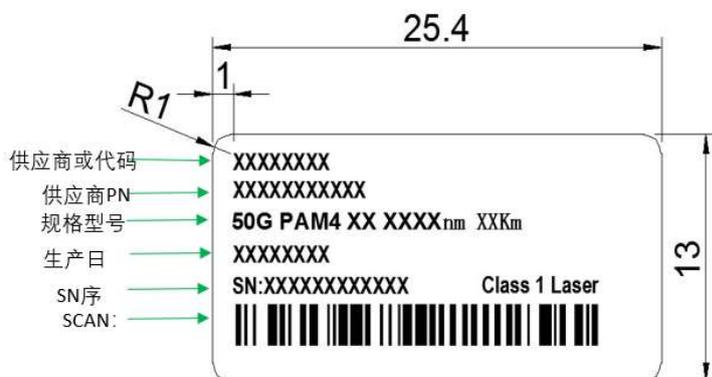

8. REGULATORY AND RELIABILITY SPECIFICATIONS.

8.1 Laser Safety

This is a Class 1 Laser Product according to IEC 60825-1:2007. This product complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated (June 24, 2007).

8.2 ESD

This transceiver electrical input pins ESD failure threshold meet classification Class1. ESD tested per MIL-STD-883, Method 3015.4/JESD22-A114-B (HBM). However, normal ESD precautions are still required during the handling of this module. This transceiver is shipped in ESD protective packaging. It should be removed from the packaging and handled only in an ESD protected environment.

8.3 Electromagnetic Emission

The module is designed to comply with Class A electromagnetic emission according to GR-1089-CORE Sections 3.2.1.1 and 3.2.1.3.

8.4 Flammability

The module is designed to comply with GR-63 section 4.2.3 for fire resistance.

8.5 RoHS

The module complies with Directive 2015/863/EU on the restriction on the use of certain hazardous substances in electrical and electronic equipment.

8.6 Reliability

The module is designed to comply with GR-468 for general reliability. Target FIT < 3500 with 60% confidence level at 55 degree operating case temperature.